



S21 TRANS LOG MAG.  
▶0.000 dB 0.200 dB/DIV

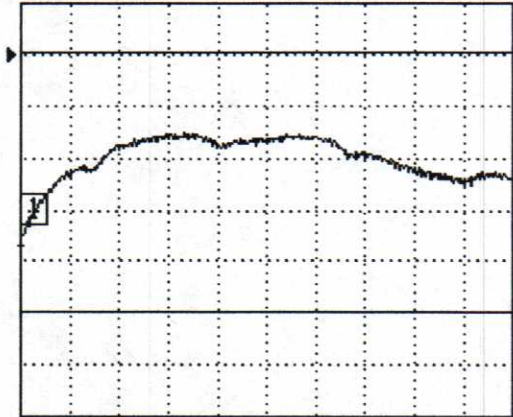


8.000000000 GHz 20.000000000

S11 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

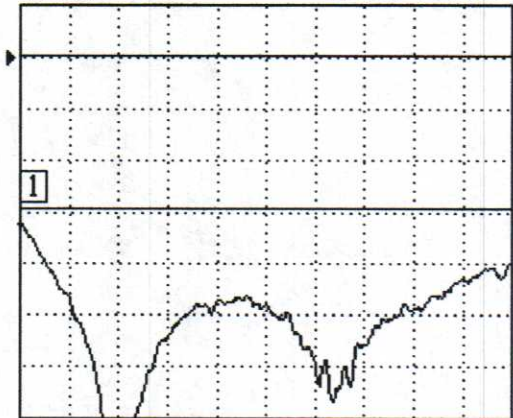


8.000000000 GHz 20.000000000

S22 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIV

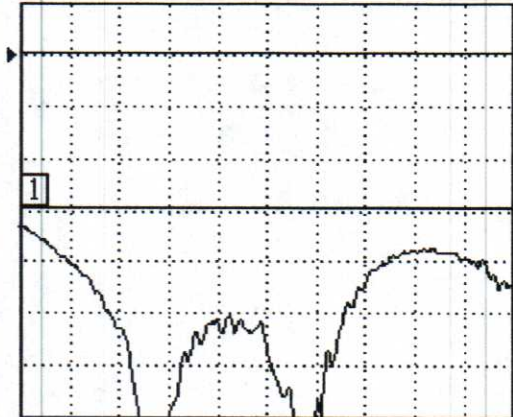

8.000000000 GHz 20.000000000

S12 TRANS LOG MAG.  
▶0.000 dB 5.000 dB/DIV

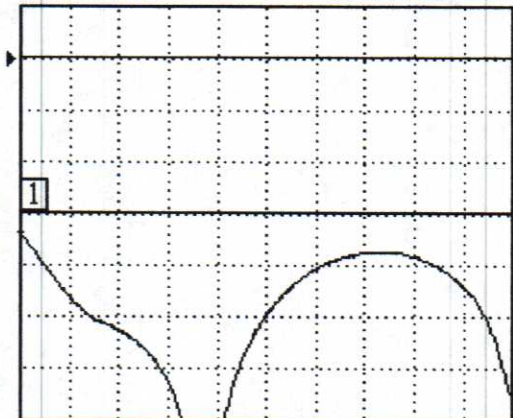

8.000000000 GHz 20.000000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 1  
8.000000000 GHz  
-0.740 dB

MARKER TO MAX  
▶MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3I 8020 Isolator  
8.0 - 20.0 GHz  
Isolation: 15 dB Min  
Insertion Loss: 1.00 dB Max  
VSWR: 1.50:1 Max  
SMA-F input / SMA-F output